


OR-6090 UV

UV Flatbed Printer 3 x EpsonI3200-U1 (optional RicohG5i)

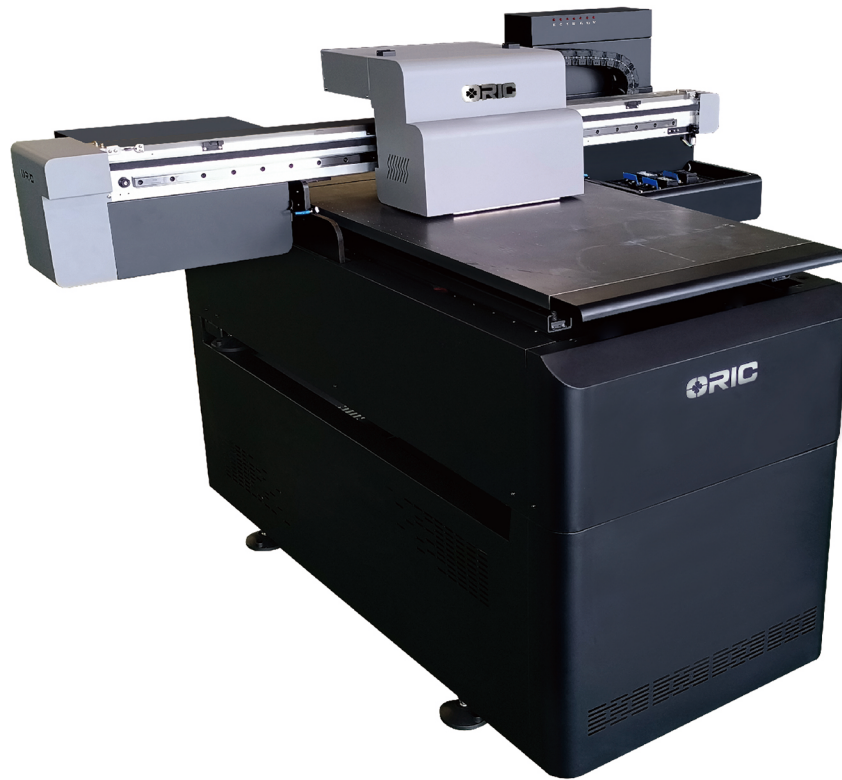


(Crystal logo, nameplate, sand gold medal and various personalized gifts, etc.)

ORIC UV Ink




EpsonI3200-U1x3



color / white+color / white+color+oil

The application scheme of crystal labeling is a new technology of the digital revolution. The advantage of this new technology is that it can be directly attached to the material to be transferred after printing, which is convenient and fast without other processing.

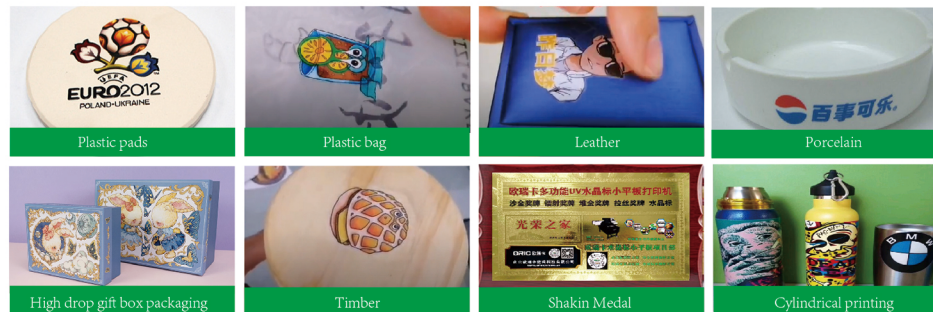

Applications: pen sets, industrial and packaging applications, logos, display props, personalized photos, photo frame production, crystal image products, handmade gifts, souvenirs, lighters, coasters, mobile phone case personalized products, USB flash drives, keychains, ashtrays, broochs, lunch boxes, belts, wallets, wallets, insoles, personalized customized sneakers and printing of high drop processing cylindrical products less than 18cm, etc.

OR-6090 UV (EpsonI3200-U1x3) Printing speed:

CMYK-6pass	4.88 sqm/h
W+CMYK+V / W+CMYK-6pass	4.66 sqm/h

● Technical Specifications

Model	OR-6090 UV	
Print Head	3 x EpsonI3200-U1 (optional RicohG5i)	
Printing Technology	Grayscale micro piezoelectric inkjet technology	
Acceptable Media	Width	900x600 mm
	Thickness	1-180 mm
Resolution	2400dpi	
Ink	Type	UV Ink
	Capacity	Continual Ink Supply System (1.5L ink tank)
	Color	CMYK / Lc / Lm / W
Curved surface height	Additional cylindrical fixtures	
Ink Curing Unit	Dual UV LED Lamps (air-cooled Lamps)	
Interface	Gigabit network port	
Power Supply	AC 220V±10%, 16A, 50/60 HZ	
RIP	Rinprint / PhotoPrint	
Machine size / weight (with bracket)	1637(W)x1460(D)x1400(H) mm / 200kg	
Package size / weight (with bracket)	2400(W)x1600(D)x1700(H) mm / 250kg	
Power	Operating status:1500W	
Environment	Power on	Temperature:59F to90F [15C to 32C] (68 F [20C]/ Humidity: 35 to 80% (no condensation)
	Power off	Temperature:41F to 104 F [5C to 40C]/ Humidity: 20 to 80% (no condensation)
Accessories	USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.	

● Technical Characteristics

- OR-6090 UV is equipped with 3 original Epson I3200-U1 print heads, optional RicohG5i print heads;
- The printing size is 600 mm (X) x 900 mm (Y);
- 15mm long-distance injection, breakthrough to achieve curved surface, concave and convex irregular surface inkjet printing pattern;
- Optional medium thickness at 1-180 mm;
- Printable flat materials, multi-product direct printing scheme and special printing scheme for crystal labeling;
- Printable cylindrical materials (optional components).

Introduction to the use of crystal labels



1 Design pattern

Use photoshop, illustrator or other software to complete your design pattern and save printable mode files.



2 Print PET materials

First of all, choose the material to print directly with the printing equipment, and print white, color and light oil according to the required printing mode.



Support multi-layer printing mode



3 Transfer film

After printing, use special film-coating equipment for film pressing.



4 Hot melt film

Cut out the desired pattern, paste it on the prepared material, repeat edly and slowly press the pattern, and tear off the surface film.



Print the pattern



Adhesive transfer film



Remove the transfer membrane



Accomplish